

KVA-XXL-MS-E EMC cable gland



for particularly large diameters



KVA-XXL-MS-E

EMC and sealing cable gland made by brass for particularly large cable diameters.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology
- Control cabinet construction

Material

Brass, nickel plated
Contact system: stainless steel 1.4310


Properties

- Large-area cable sealing
- Easy to assemble
- Large clamping range

Technical data

Protection class: IP 68 - 10 bar

Temperature range: -40°C up to +135°C

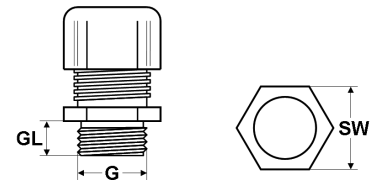

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

| Part no. | Size Metr. | Cable Ø from / to mm | Outer Ø Shielding from / up to mm | Thread length mm | Spanner size mm | Unit | Net EUR/100 items at a purchase of | | |
|----------|------------|----------------------|-----------------------------------|------------------|-----------------|------|------------------------------------|-----------|------------|
| | | | | | | | up to 100 | 101 - 500 | 501 - 1000 |
| 98257 | M63 x 1,5 | 40,0 - 45,0 | 36,0 - 41,0 | 10,0 | 65 | 1 | o. r. | o. r. | o. r. |
| 96560 | M63 x 1,5 | 45,0 - 51,0 | 36,0 - 45,0 | 10,0 | 70 | 1 | o. r. | o. r. | o. r. |
| 94218 | M63 x 1,5 | 45,0 - 51,0 | 40,0 - 48,0 | 10,0 | 70 | 1 | o. r. | o. r. | o. r. |
| 98725 | M63 x 1,5 | 51,0 - 55,0 | 40,0 - 48,0 | 10,0 | 80 | 1 | o. r. | o. r. | o. r. |
| 94189 | M72 x 2,0 | 40,0 - 45,0 | 36,0 - 41,0 | 15,0 | 70 | 1 | o. r. | o. r. | o. r. |
| 94847 | M72 x 2,0 | 45,0 - 51,0 | 40,0 - 48,0 | 15,0 | 70 | 1 | o. r. | o. r. | o. r. |
| 905498 | M72 x 2,0 | 51,0 - 55,0 | 40,0 - 48,5 | 15,0 | 80 | 1 | o. r. | o. r. | o. r. |
| 94208 | M72 x 2,0 | 51,0 - 55,0 | 46,0 - 54,0 | 15,0 | 80 | 1 | o. r. | o. r. | o. r. |
| 94188 | M72 x 2,0 | 54,0 - 58,0 | 40,0 - 48,0 | 15,0 | 80 | 1 | o. r. | o. r. | o. r. |
| 93728 | M75 x 1,5 | 42,0 - 48,0 | 40,0 - 48,0 | 15,0 | 70 | 1 | o. r. | o. r. | o. r. |
| 91600 | M75 x 1,5 | 45,0 - 51,0 | 40,0 - 48,0 | 15,0 | 70 | 1 | o. r. | o. r. | o. r. |
| 90068 | M75 x 1,5 | 54,0 - 58,0 | 46,0 - 54,0 | 15,0 | 80 | 1 | o. r. | o. r. | o. r. |
| 97066 | M80 x 2,0 | 58,0 - 64,0 | 46,0 - 54,0 | 15,0 | 95 | 1 | o. r. | o. r. | o. r. |
| 98908 | M80 x 2,0 | 63,0 - 70,0 | 46,0 - 54,0 | 15,0 | 95 | 1 | o. r. | o. r. | o. r. |
| 905303 | M80 x 2,0 | 63,0 - 70,0 | 46,0 - 58,0 | 15,0 | 95 | 1 | o. r. | o. r. | o. r. |

Dimensions and specifications may be changed without prior notice.

o. r. = on request